

FT-B

ABOUT THE BROW LIGHT

Thinner, Brighter, and Guaranteed Forever. That's the FireTech way. The FireTech Brow Light is the ultimate lighting solution for the front of your Fire Apparatus and there is a reason it is trusted by some of the nation's largest fleets.

Available with optional Integrated DOT Marker lights and split circuits, this product is the first fixture specifically designed from the ground up for use on the front of an apparatus cab to illuminate the roadway.

One of the secrets to the success of the FireTech Brow Light is the ability to attach the light at multiple points along the extrusion.

This patented, adjustable rail mounting system allows the FireTech Brow Light to be attached more securely to the apparatus. This means that overtime, it will not flex and succumb to moisture intrusion. The FireTech Brow Light's extreme reliability and proven track record is why it is the ultimate lighting solution for forward facing scene lighting.



BROW LIGHT FEATURES

OPTIONAL MARKER LIGHTS (DOT COMPLIANT)

Each FireTech Brow Light has the added option of integrated DOT Approved marker lights to help increase safety and awareness.

ADJUSTABLE MOUNTS ALONG BODY


Using our patented rail mounting foot, the FireTech Brow Light can be securely attached to the cab every 12 inches, preventing the housing from flexing which would cause moisture intrusion.

ALL ALUMINUM CONSTRUCTION


FireTech Brow Lights are manufactured from a solid billet of aluminum which offers superior structural rigidity and thermal dissipation.

DOMINATE THE SCENE WITH 5 LIGHTS IN ONE

The FireTech Brow Lights give you right type of lighting for the leading edge of your apparatus cab. By combining a long distance spot beam with multiple flood beams, your apparatus will have both range and coverage.

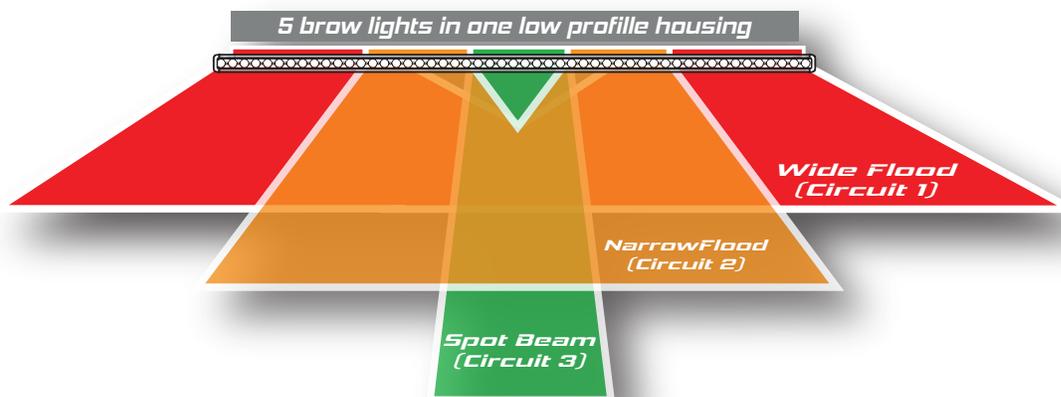

DIMENSIONS

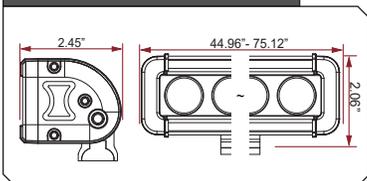

STANDARD BROW LIGHTS

FT-B-46-W | 36 LEDS | 19,008 RAW LM | 180 WATTS



FT-B-54-2PKIT-W | 42 LEDS | 22,176 RAW LM | 210 WATTS



FT-B-65-W | 51 LEDS | 26,928 RAW LM | 255 WATTS



FT-B-72-W | 57 LEDS | 30,096 RAW LM | 285 WATTS



FT-B-72-3PKIT-W | 57 LEDS | 30,096 RAW LM | 285 WATTS



FT-B-2.72-W | 114 LEDS | 60,192 RAW LM | 540 WATTS



MARKER BROW LIGHTS

FT-B-46-ML-W | 35 LEDS | 15,840 RAW LM | 150 WATTS (WHITE LEDS) 15 WATTS (MARKER LEDS)



FT-B-46-ML3-W | 39 LEDS | 19,008 RAW LM | 180 WATTS (WHITE LEDS) 9 WATTS (MARKER LEDS)



FT-B-72-ML-W | 59 LEDS | 28,512 RAW LM | 270 WATTS (WHITE LEDS) 15 WATTS (MARKER LEDS)



FT-B-72-ML-3PKIT-W | 59 LEDS | 28,512 RAW LM | 270 WATT (WHITE LEDS) 15 WATTS (MARKER LEDS)



● SIMULATES LOCATION OF AMBER MARKER LEDS

FT-B

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-B-46-W	46" Brow Light. 36 LEDs. 5 Watt chip sets. 3 circuits. White housing.	19,008	13,305.6	180W	15.0A	Spot, Flood, and Scene	46"	6
FT-B-46-B	46" Brow Light. 36 LEDs. 5 Watt chip sets. 3 circuits. Black housing.	19,008	13,305.6	180W	15.0A	Spot, Flood, and Scene	46"	6
FT-B-46-B-ML3	44" Brow Light. 35 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing.	15,840	11,088	165W	13.75A	Spot, Flood, Scene,	44"	7
FT-B-46-W-ML3	44" Brow Light. 35 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing.	15,840	11,088	165W	13.75A	Spot, Flood, Scene,	44"	7
FT-B-46-ML3-B	50" Brow Light. 39 LEDs. 5 Watt chip sets. 3 integrated marker lights, 4 circuits. Black housing.	19,336	13,535.2	189W	15.75A	Spot, Flood, Scene	50"	7
FT-B-46-ML3-W	50" Brow Light. 39 LEDs. 5 Watt chip sets. 3 integrated marker lights, 4 circuits. White housing.	19,336	13,535.2	189W	15.75A	Spot, Flood, Scene	50"	7
FT-B-54-2PKIT-B	2 piece 54" Brow light, 42 LEDs. 5 Watt chip sets. Black Housing.	22,176	15,532.2	260W	21.77A	Spot, Flood, Scene	55"	8
FT-B-54-2PKIT-W	2 piece 54" Brow light, 42 LEDs. 5 Watt chip sets. White Housing.	22,176	15,532.2	260W	21.77A	Spot, Flood, Scene	55"	8
FT-B-65-B	65" Brow Light. 51 LEDs. 5 Watt chip sets. 5 integrated marker lights, 3 circuits. Black housing.	26,928	18,849.6	255W	21.3A	Spot, Flood, Scene	65"	9
FT-B-65-W	65" Brow Light. 51 LEDs. 5 Watt chip sets. 5 integrated marker lights, 3 circuits. White housing.	26,928	18,849.6	255W	21.3A	Spot, Flood, Scene	65"	9
FT-B-65-ML3-B	65" Brow Light. 51 LEDs. 5 Watt chip sets. 3 integrated marker lights, 3 circuits. Black housing.	26,328	18,429.6	249W	21.3A	Spot, Flood, Scene, Marker	65"	9
FT-B-65--ML3-W	65" Brow Light. 51 LEDs. 5 Watt chip sets. 3 integrated marker lights, 3 circuits. White housing.	26,328	18,429.6	249W	21.3A	Spot, Flood, Scene, Marker	65"	9
FT-B-72-B	72" Brow Light. 57 LEDs. 5 Watt chip sets. 30,096 lumens. 3 circuits (spot, flood and scene). Black housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	72"	10
FT-B-72-W	72" Brow Light. 57 LEDs. 5 Watt chip sets. 30,096 lumens. 3 circuits (spot, flood and scene). White housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	72"	10
FT-B-72-ML-B	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	9
FT-B-72-ML-W	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	9
FT-B-72-ML-3PKIT-B	3 Piece 77" Brow Light with marker lights. For radiused cabs. 4 circuits. Black housing	30,152	21,106.4	285W	23.75A	Spot, Flood, Scene	77"	12
FT-B-72-ML-3PKIT-W	3 Piece 77" Brow Light with marker lights. For radiused cabs. 4 circuits. White housing	30,152	21,106.4	285W	23.75A	Spot, Flood, Scene	77"	12
FT-B-72-3PKIT-B	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	12
FT-B-72-3PKIT-W	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	12
FT-B-2.72-W	72" Brow Light. 114 LEDs. 5 Watt chip sets;	60,192	42,134.4	540W	45A	Spot, Flood, Scene	72"	12
FT-B-2.72-B	72" Brow Light. 114 LEDs. 5 Watt chip sets;	60,192	42,134.4	540W	45A	Spot, Flood, Scene	72"	12