
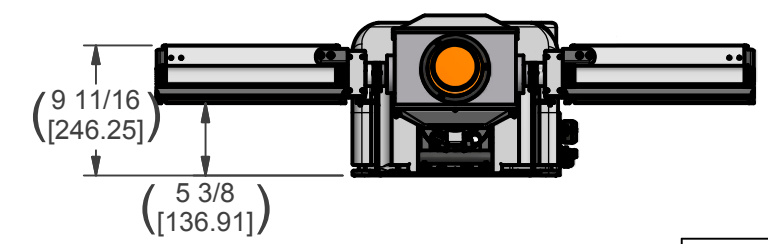
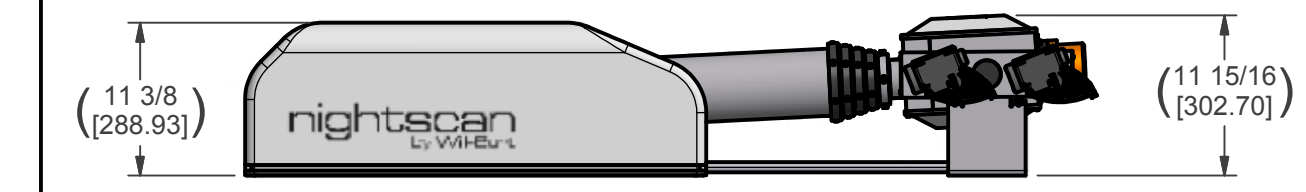
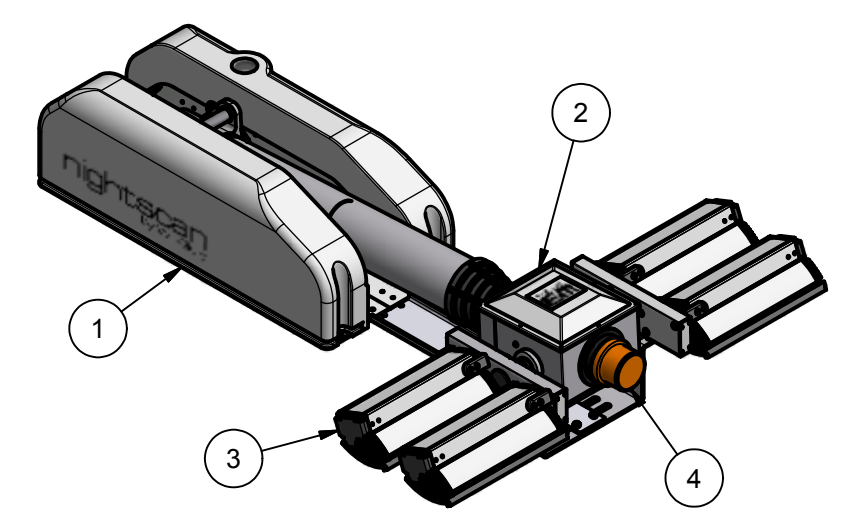


| Table | | ITEM-2 P/N | ITEM-3 P/N | ITEM-4 P/N |
|-------------|--|------------|------------|------------|
| PART NUMBER | DESCRIPTION | | | |
| 721060010 | NS 3.0-4000 OPTIMUM 110 VAC | 4742501 | 4574618 | NONE |
| 721060011 | NS 3.0-4000 OPTIMUM 110 VAC AMBER STROBE | 4742505 | 4574618 | 4481601 |

| REVISION HISTORY | | | | |
|------------------|-----|------------------|-----------|----------|
| ECN | REV | DESCRIPTION | DATE | APPROVED |
| 11439 | N | RESTRUCTURED BOM | 1/17/2013 | RCC |
| 12601 | P | Added 721060011 | 3/3/2015 | RCC |

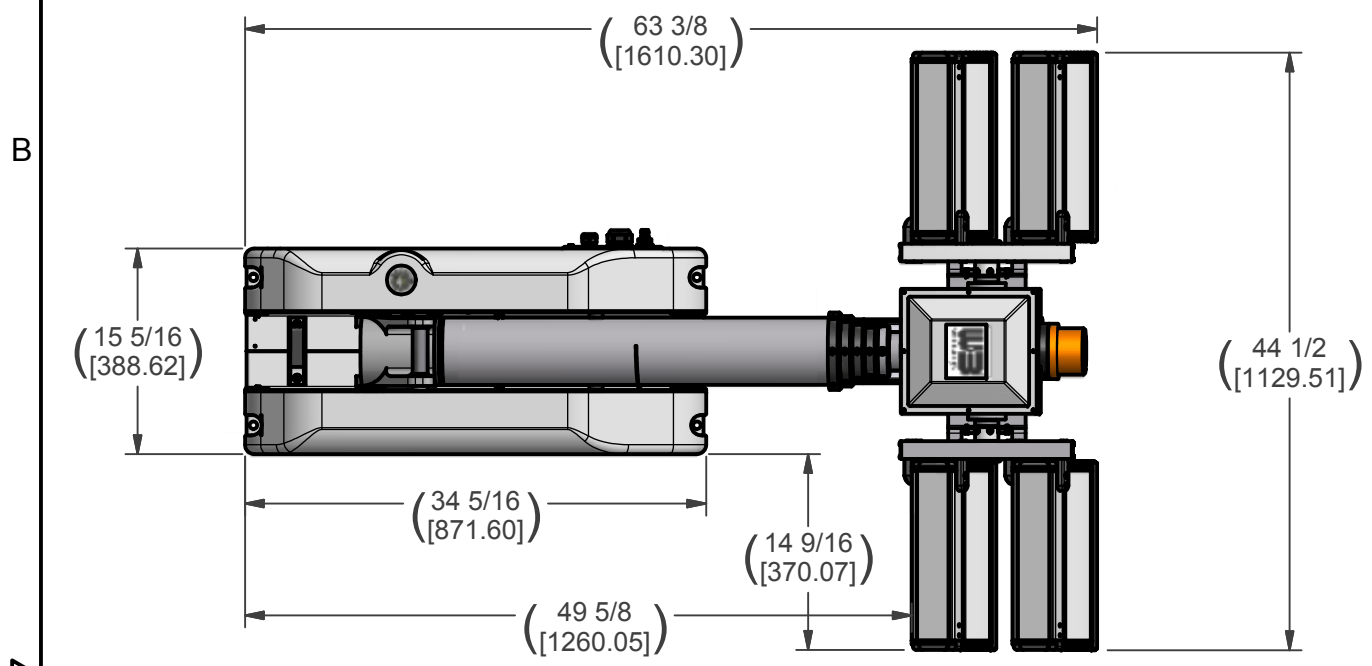


| BOM | | | |
|------|-----|-------------|--|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 1 | 4627603 | BASE ASSEMBLY POWERLITE 10 FT CLR |
| 2 | 1 | SEE TABLE | RCP ASSEMBLY NSP STD |
| 3 | 1 | SEE TABLE | OPT 4 LIGHT, 4000W (4-1000 110VAC) WHT |
| 4 | 1 | SEE TABLE | Strobe Light Kit, Amber |
| 5 | 1 | 4807801 | KIT, SHIPPING NSP (NOT SHOWN) |
| 6 | 1 | 4706703 | LABEL KIT-CLEAR CE (NOT SHOWN) |

NOTE:
SECONDARY DIMENSIONS - MILLIMETERS NOTED IN BRACKETS


| | | | | | | |
|-------------------------|---|---|---|------|-----------|--------------|
| MATERIAL | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DIMENSIONS ± 0.005 ANGLES ± 1° 1. ALL ANGLES 90° 2. ALL INSIDE EDGES TO HAVE .005" TO .035" FILLETS. 3. ALL OUTSIDE EDGES TO HAVE .005" TO .015" CHAMFER OR RADIUS. | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE WILL-BURT COMPANY ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF THE WILL-BURT COMPANY IS PROHIBITED. | AN EMPLOYEE OWNED COMPANY ORRVILLE, OH | | | |
| | | | TITLE NS 3.0-4000 OPTIMUM 110 VAC | | | |
| FINISH | | APPROVALS | DATE | SIZE | DWG NO | REV |
| APPROX. WT:152.9 lbmass | | RCC | 7/19/2012 | B | 721060010 | P |
| THIRD ANGLE PROJECTION | 125° ON ALL MACHINED SURFACES | CHECKED | | PN: | SEE TABLE | SHEET 1 OF 2 |

**BOTTOM VIEW
MOUNTING BOLT PATTERN**

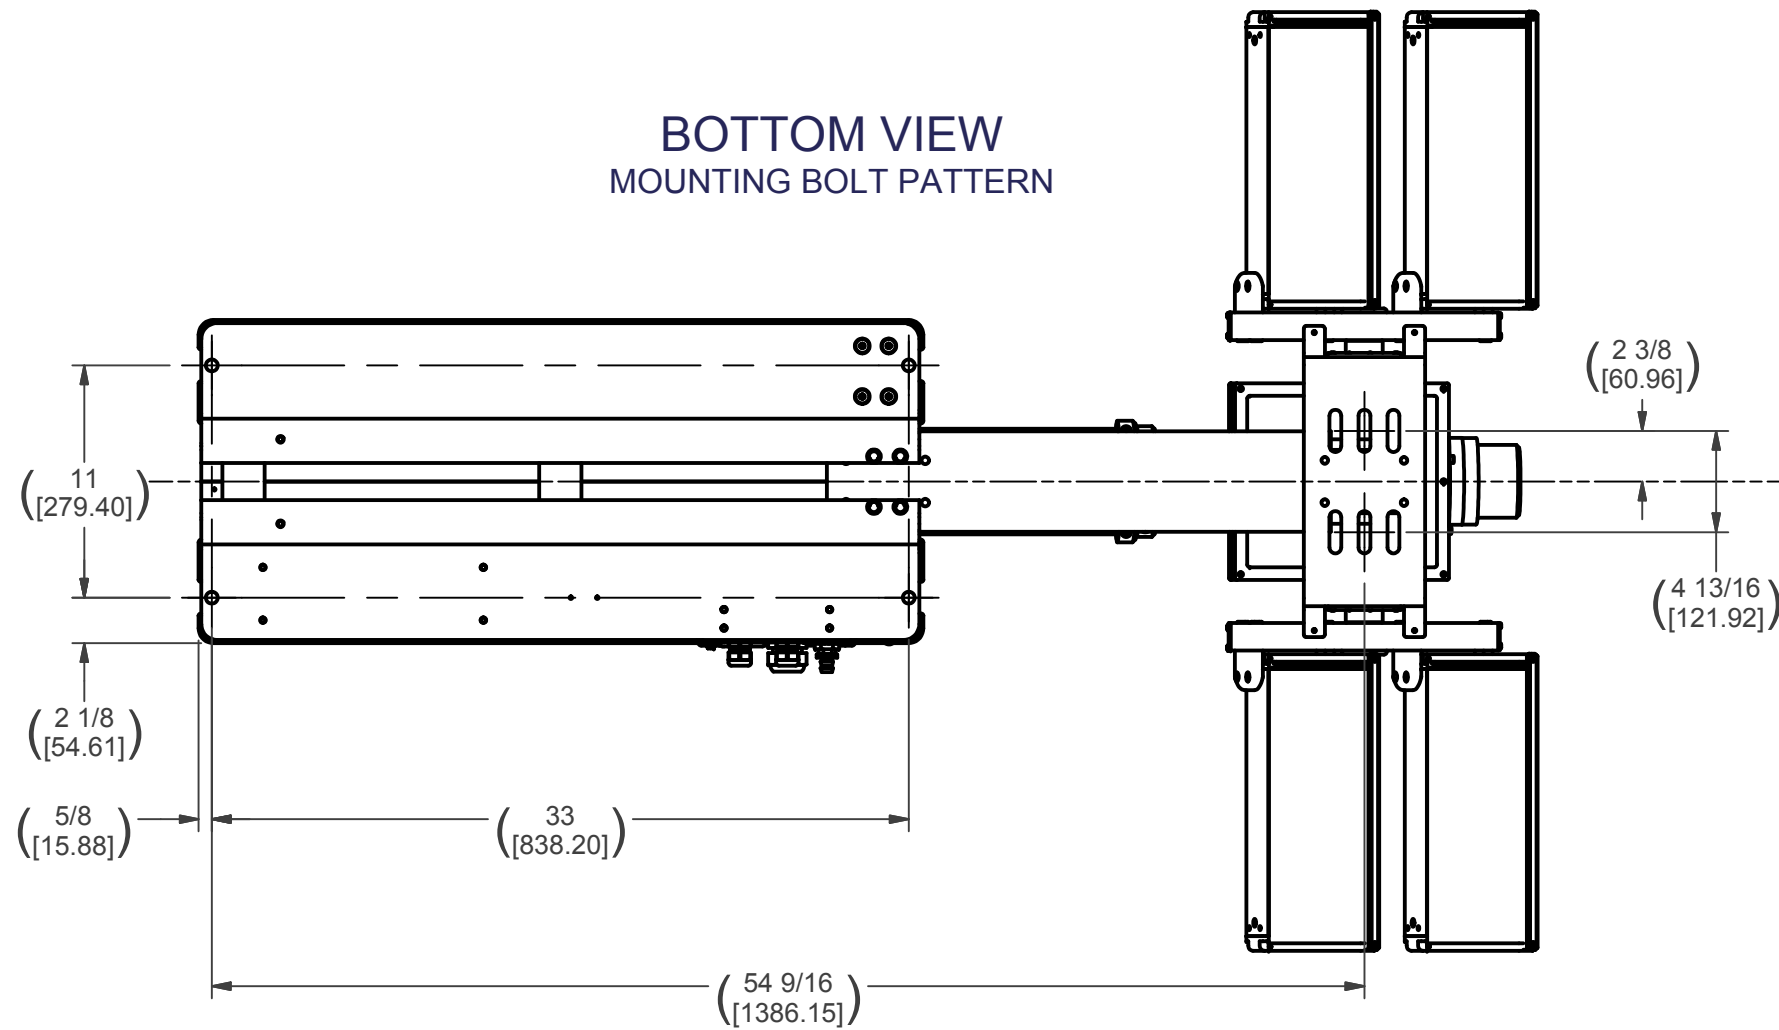

NOTE:

- 1 APPLY RTV #739 OR EQUAL TO ALL OPEN HOLES
- 2 SEE WIRING DIAGRAM WD-46276 FOR WIRING DETAILS
- 3 SET LIGHT BARS HOME POSITION PARALLEL TO BASE PLATE WHEN STOWED
- 4 APPLY LOCTITE #242 OR EQUAL TO ALL THREADS UNLESS OTHERWISE NOTED
- 5 APPLY A COAT OF SILICONE GREASE TO RCP MOTOR BORES PRIOR TO SHAFTS BEING INSTALLED

| | | | | | |
|-------------------------|---|--|-------------------|---|--------------------------|
| MATERIAL | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DIMENSIONS ± 0.005 ANGLES ± 1° 1. ALL ANGLES 90° 2. ALL INSIDE EDGES TO HAVE .005" TO .035" FILLETS. 3. ALL OUTSIDE EDGES TO HAVE .005" TO .015" CHAMFER OR RADIUS. 125° ON ALL MACHINED SURFACES | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE WILL-BURT COMPANY ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF THE WILL-BURT COMPANY IS PROHIBITED. | |  AN EMPLOYEE OWNED COMPANY ORRVILLE, OH | |
| FINISH | | | | TITLE NS 3.0-4000 OPTIMUM 110 VAC | |
| APPROX. WT:152.9 lbmass | | APPROVALS DRAWN RCC | DATE 7/19/2012 | SIZE B | DWG NO 721060010 |
| THIRD ANGLE PROJECTION | | CHECKED | | PN: SEE TABLE | REV P SHEET 2 OF 2 |