
	4	3	\forall		2				1			-
					CN 3993	REV 00	DESCRII			0ATE 8/2018 F	BY/APPR RCC	-
В												В
₽					NOTES: APPLY RTV #739 OR EQUAL TO ALL OPEN HOLES SEE WIRING DIAGRAM WD-46276 FOR WIRING DETAILS SET LIGHT BARS HOME POSITION PARALLEL TO BASE PLATE WHEN APPLY LOCTITE #243 OR EQUAL TO ALL THREADS UNLESS OTHERW APPLY A COAT OF SILICONE GREASE TO RCP MOTOR BORES PRIOR SHAFTS BEING INSTALLED NSTALL GROUND WIRE ASSEMBLY TO BOARD AND RCP HOUSING.				HERWISI PRIOR T	ISE NOTED	A	
							BC	DM				-
				ITEM	QTY	PART NUMBER			CRIPTION			
				1	1	4627601		BLY NSP 15 FT.]
				2	1	4742523		SEMBLY- W/O SH				_
				3	1		,	ED 120/240VAC				-
			-	4	1	4706703		IT CE (NOT SH	,			-
А				5 6	1	4807801 WD-46276		G NSP (NOT SH RAM (NOT SHO	,			A
			UNLESS OTHERWISE SPEC	-	PROP	PRIETARY AND COI		,				
			DIMENSIONS ARE IN INC			ORMATION CONTAIN		WILL-BURT		rville, o		
			TOLERANCES ON DECIMALS	ANGLES		NG IS THE SOLE PROPE IRT COMPANY ANY RI		TITLE				-
			$0 = \pm 0.030$ $00 = \pm 0.010$ $000 = \pm 0.005$		IN PART	OR WHOLE WITHOUT	THE WRITTEN					
			FRACTIONAL ± 1/64" 1. ALL INSIDE EDGES TO HAVE			PROVALS	DATE	SIZE DWG N			REV	
		APPROX. WT:205.6 lbmass	 ALL INSIDE EDGES TO HAVE .005" TO .035" FILLETS. ALL OUTSIDE EDGES TO HAVE 	=		RCC	5/8/2018	В	7215880)44	00)
		THIRD ANGLE PROJECTION	.005" TO .015" CHAMFER OR R	ADIUS.	CHECK	ED		PN: 704500044		SHEF	ET 1 OF 2	1
	4		¹²⁵ ON ALL MACHINED SUR		<u></u>			721588044	, 			
C:\ Vault-WF	4 [3	4		2		I		1			

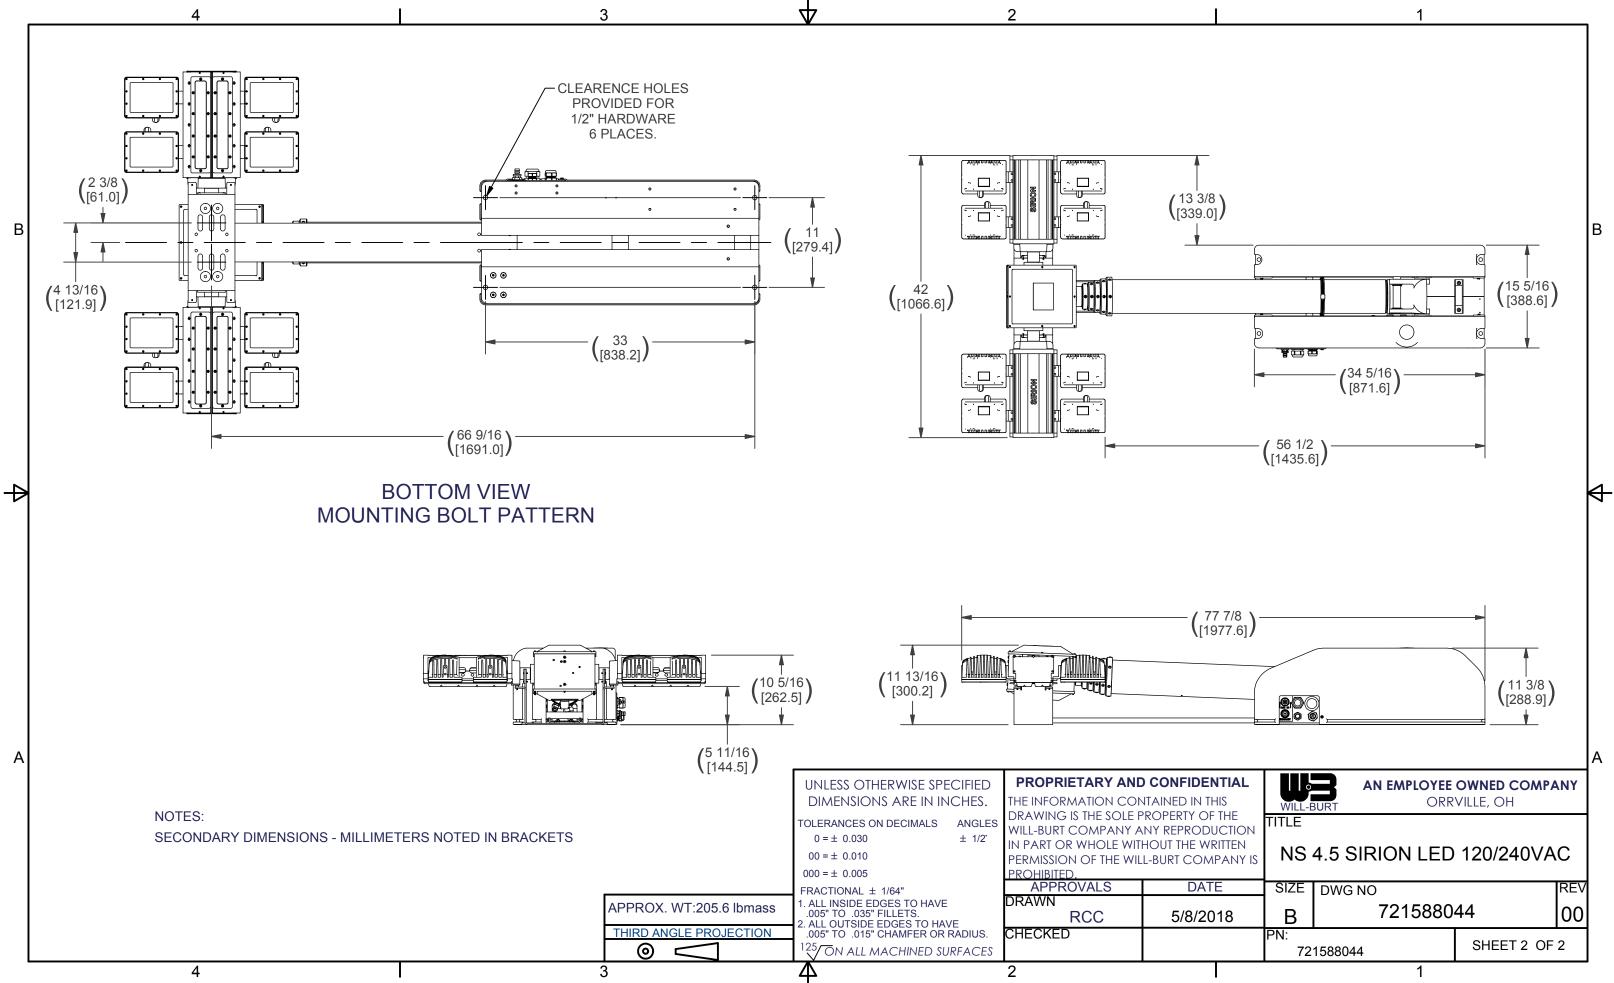

C:_Vault-WF\Inventor\72000000\721588044.idw