









MOBILE LIGHTING SOLUTIONS



Will-Burt Night Scan®

THE #1 SELLING LIGHT TOWER IN THE WORLD!

The Advantages of Night Scan® by Will-Burt

WILL-BURT ADVANTAGES	VALUE TO CUSTOMER
 Higher Height Up to 56% higher Roof-mounted up to 25 ft. / 7.5 m Vertical mount up to 30 ft. / 9 m 	 More Light Coverage Greater scene illumination No light glare for oncoming traffic Light clears tall trees and 2 story houses
 Light at Any Height Does not need to be fully extended to illuminate One button "auto-extend" 	Fast and Flexible • Adapts to every situation • Fast operation increases safety and efficiency
Light in Any Direction • Dual Tilt Feature • Straight up or down or anywhere in between • Equal light front and back	Light Where You Need and How You Need It Rooftops, treetops and power lines Illuminate forward and backward equally – 360° Illuminate ravines and steep inclines
Lighter Weight • Over 42% lighter	 Cost Savings Fuel and installation (no roof reinforcement) More funds to purchase other equipment
 More Power Options All electric with built-in air elevation Onboard truck air system AC or DC powered models Internal power wires 	Flexible Installation New build or aftermarket compatible No generator required options Protected from the elements and damage
More Installation Options • 8 platforms to choose from • Roof mount to cab or body • Vertical mount internal or external	Meets Your Unique Vehicle Specifications • Allows installation on more vehicle types • New and Aftermarket
More Light Options • The most popular brands • LED and Halogen types • Over 400 light and tower combinations	Meets Your Specific Requirements • Technically advanced to budget friendly • Lower power consumption • High lumen output
Pneumatic Tube Construction • Anodized aluminum mast tubes	Reliable in Extreme Environments As tested and proven, from the cold and ice of Canada to the sand and dust of the Middle East



nightscan[®] Because You Need Light Every Night









Why You Need a Night Scan Light Tower

Safety is the number one requirement when answering a call and nighttime operations create an even bigger challenge. Night Scan light towers create a safer work environment by lighting the scene from above, like natural daylight.

Overhead lighting reduces glare for oncoming traffic and does not blind the crew. Night Scan light towers allow you to customize light intensity and coverage by stopping the tower at any height before it is fully extended. Installation flexibility is delivered with three lightweight options; roof-mounted to the apparatus, internally installed extending through the roof or mounted externally to the vehicle.

All Night Scan light towers meet or exceed all NFPA 1901-16 requirements. The Made in the USA, maintenance-free design operates in nearly any environment – from dusty, hot deserts to -22°F, snowy conditions. The Powerlite dual-tilt light option allows you to illuminate 360° of the scene by equally distributing light front and back.

The nearly limitless options of Night Scan ensures that it will meet the needs of your department. Hilly terrain or tall buildings might require a light tower of 30 feet with six high-powered lamps. Small vehicles might be better suited with a 3.25 foot Night Scan Chief model with two lamps. The towers can accommodate any vehicle's electrical system with either LED or Halogen lamps from the best brands - FRC, Whelen and Will-Burt.

The always upright design of Night Scan provides the best platform for adding optional strobe lamps or video cameras. Video

cameras can be used for scene recording, training or remote monitoring of operations. Will-Burt has a full range of video options from simple, fixed lens cameras to high-definition and thermal imaging PTZ cameras.

Choose Night Scan and operate under the safest nighttime conditions, because You Need Light Every Night!

Selecting the Night Scan That is Best For You

- 1. Review your total height requirements. If your terrain is hilly or there are tall trees or buildings, you might want a taller tower, up to 30 feet. Remember that the mounting location will add height as well. Night Scan platforms are available from 3.25' to 30'.
- 2. How much space is available for the light tower? If ample roof space is available; a lightweight, compact, folding, roof-mounted tower is a good option. If space is tight, a through the roof vertical light tower or side mounted vertical tower might be the best option.
- 3. How much light do you need? 2, 4 or 6 LED or halogen lamp options are available. Total lumens can reach 220,000.
- 4. What type of electrical system is available? 12 and 24 DC options are available for vehicle electrical systems and 120 and 240 AC options are available for vehicles that have on-board generators.
- 5. Select the tower remote control that is best for your needs. Wired controllers, panel-mount controllers and wireless controllers are available.
- 6. Last, what options are needed? Warning strobes and video cameras are available on most Night Scan light towers. See page 12 for the tower and light options or visit http://www.willburt.com/support/support-center/ez-spec/ for options and downloadable specifications.

CONTENTS



NIGHT SCAN® LITE5



NIGHT SCAN® TOWER AND LIGHT PACKAGE OPTIONS...... 12-13



NIGHT SCAN® CHIEF AND POWERLITE **LIGHT TOWER** 6-7



NIGHT SCAN® LED LAMPS14



NIGHT SCAN® XTREME AND VERTICAL COMPLETE LIGHT TOWER8



VALUE-ADDED ACCESSORIES......15



NIGHT SCAN® VERTICAL LIGHT TOWER9



NIGHT SCAN® SPOT AND SCOUT16



LIGHTING GUIDE10



MOBILE VIDEO SYSTEMS & LED LIGHTING **UPGRADE KITS** 17-18



NIGHT SCAN° SIRION......11



FIRETECH.....19

NIGHT SCAN® LITE

The All New Night Scan Lite is a compact, folding light tower that merges cutting edge LED light technology with proven mechanical design to deliver fast and reliable scene illumination. The Night Scan Lite is self-contained and is energy efficient - no generator is needed. The lightweight design assures that the light tower can be installed on nearly any flat vehicle or trailer surface.

ESSENTIAL FEATURES

- Rugged, weatherproof design
- Remote light positioning
- Lights IP69k water-proof
- 2 year warranty
- Safety LED look-up light
- Wired hand-held controller
- No routine maintenance
- CE Certified / NFPA Compliant
- Patent pending





Extends 2 meters above the emergency service vehicle



Provides over 384 sq. meters of safe work area at 30+ lux



Dual optics for near and far illumination



Can be installed on nearly any flat vehicle or trailer surface



The wired controller allows for full 360° pan & tilt remote light positioning



Tested and proven to be reliable in extreme environments

SPECIFICATIONS

Model	719990281-PA09	719990290-PA09	5605403-PA09	5605401-PA09	5605407-PA09	5605405-PA09	
Extended Height			2 m	eters			
Number of LED Lamps	2	4	2	4	2	4	
Raw Lumens	40,000	80,000	40,000	80,000	40,000	80,000	
Light Positioner Rotation	360° / 19 seconds						
Light Positioner Tilt	360° / 19 seconds						
Full Extension			Under 15	seconds			
Operating Temperature			-20°C to	o +70°C			
Survival Wind Speed			160	km/h			
System Weight	87 kg	93 kg	90 kg	96 kg	91 kg	97 kg	
Input Voltage	24 VDC	24 VDC	12 VDC*	12 VDC*	110 / 220 VAC*	110 / 220 VAC*	
Maximum Amps	30	40	60	80	110 VAC 6 amps / 220 VAC 3 amps	110 VAC 8 amps / 220 VAC 4 amps	

^{*}includes external power supply

NIGHT SCAN® CHIEF

The Will-Burt Night Scan® Chief is a roof-mounted, fold-down light tower which requires no interior vehicle space. It is typically used on medium-size rescue, pumper rescue, service and utility vehicles. The Night Scan® Chief features a self-

contained air system (no external air supply needed) and is available with all

DC (12V/24V DC) operations in which generator or inverter is not required.

Night Scan®						
Chief	1.0	1.8	2.3			
Height (ft.) / (m)	3.25 / 1	6 / 1.8	7.5 / 2.3			
System Weight Range (lb.) / (kg)	97 lb. / 44 kg - 135 lb. / 61 kg					
Auto Deploy and Auto Stow®	Yes	Yes	Yes			
Time to Light	8 seconds	8 seconds	10 seconds			
Number of Lights Available	2 or 4	2 or 4	2, 4 or 6			
Light Type Available	LED / Halogen	LED / Halogen	LED / Halogen			
Maximum Lumens	80000	140000	140000			
Full Pan and Tilt Light Positioning	Yes	Yes	Yes			
Opposable Light Fixtures	No	No	No			
VDC / Watts Maximum	12 or 24 / 500	12 or 24 / 640	12 or 24 / 920			
VAC / Watts Maximum	120 or 240 / 6000	120 or 240 / 6000	120 or 240 / 6000			
Profiler – Space- Saving Fixture Option	Yes – 2 or 3 lights	Yes – 2 or 3 lights	Yes – 2 or 3 lights			
Strobe Light Option	Yes	Yes	Yes			
Camera Option	Yes	Yes	Yes			
*Wind Speed Survival	140+ mph / 225+ km/h	140+ mph / 225+ km/h	114 - 140 mph / 184 - 225 km/h			
Operating Temperature	-22°F to +149°F/	-22°F to +149°F / -30°C to +65°C				

^{*}Varies depending on light package - 125% NFPA Safety Factor









NIGHT SCAN® POWERLITE

The Will-Burt Night Scan® Powerlite is a roof-mounted, fold-down light tower which requires no interior vehicle space. It is typically used on heavy-rescue vehicles, mobile command centers and airport ARFF vehicles. Opposable light fixtures provide equal lighting forward and backward at the same time – 360° of light. Delivering up to 220,000 lumens, the Night Scan® Powerlite is ideal on any vehicle where maximum light is required. The Powerlite 3.0 and 4.5 can be elevated with truck air or optional on-board compressor. The 2.3 comes with a built-in compressor.



Night Scan® Powerlite	2.3	3.0	4.5
Height (ft.) / (m)	7.5 / 2.3	10 / 3	15 / 4.5
System Weight Range (lb.) / (kg)	139 lb. / 63 kg - 178 lb. / 81 kg		
Auto Deploy & Auto Stow®	Yes	Yes	Yes
Time to Light	8 seconds	12 seconds	14 seconds
Number of Lights Available	4 - Night Scan XL 200 only	4 or 6	4 or 6
Light Type Available	LED	LED / Halogen	LED / Halogen
Maximum Lumens	80000	220000	220000
Full Pan & Tilt Light Positioning	Yes	Yes	Yes
Opposable Light Fixtures	Yes	Yes	Yes
VDC / Watts Maximum	12 or 24 / 500	12 or 24 / 1380	12 or 24 / 1380
VAC / Watts Maximum	N/A	120 or 240 / 9000	120 or 240 / 9000
Profiler – Space-Saving Fixture Option	No	Yes – 2 or 3 lights	Yes - 2 or 3 lights
D-TEC* Power Line Detection System Option	No	Yes	Yes
Strobe Light Option	Yes	Yes	Yes
Camera Option	Yes	Yes	Yes
*Wind Speed Survival	114 - 140 mph / 184 - 225 km/h	86 - 140 mph / 138 - 225 km/h	69 - 118 mph / 111 - 190 km/h
Operating Temperature	-22°F to +149°F / -30°C to +65°C		

^{*}Varies depending on light package - 125% NFPA Safety Factor







NIGHT SCAN® XTREME

The Will-Burt Night Scan® Xtreme is a roof-mounted, fold-down light tower which requires no interior vehicle space. It has been designed for applications where maximum height is required, such as hilly terrain, locales with mature trees or urban areas with tall buildings. Opposable light fixtures provide equal lighting forward and backward at the same time – 360° of light. The Night Scan® Xtreme can be elevated with truck air or optional on-board compressor. When the situation requires maximum elevation, Night Scan® Xtreme is the light tower you need.

NIGHT SCAN® VERTICAL COMPLETE

The Will-Burt Night Scan® Vertical Complete is a vertically mounted light tower which was created to be installed externally to the side or rear of a vehicle. This light tower includes an on-board compressor for elevation and requires no truck air. Used for elevating lights and/or cameras, it is perfect for smaller vehicles where space is limited. Measuring less than 6 inches (16 cm) deep, it can even fit between the cab and box. The compressor box can be placed below or beside the mast to suit your specific vehicle requirements.

Night Scan Model	Xtreme 6.0	Xtreme 7.5	Vertical Complete 2.3
Height (ft.) / (m)	20 / 6	25 / 7.5	7.5 / 2.3
System Weight Range (lb.) / (kg)	161 lb. / 73 kg - 199) lb. / 91 kg	70 lbs. / 32 kg - 85 lbs. / 39 kg
Auto Deploy & Auto Stow®	Yes	Yes	Yes
Time to Light	17 seconds	21 seconds	10 seconds
Number of Lights Available	2, 4 or 6	2 or 4	2 or 4
Light Type Available	LED / Halogen	LED / Halogen	LED / Halogen
Maximum Lumens	210000	140000	140000
Full Pan & Tilt Light Positioning	Yes	Yes	Yes
Opposable Light Fixtures	Yes	Yes	No
VDC / Watts Maximum	24 / 920	24 / 460	12 or 24 / 920
VAC / Watts Maximum	120 or 240 / 9000	120 or 240 / 6000	120 or 240 / 6000
Profiler – Space-Saving Fixture Option	Yes	Yes	No
D-TEC® Power Line Detection System Option	Yes	Yes	No
Strobe Light Option	Yes	Yes	Yes
Camera Option	Yes	Yes	Yes
*Wind Speed Survival	64 - 94 mph / 103 - 151 km/h	62 - 78 mph / 100 - 126 km/h	114 - 140 mph / 184 - 225 km/h
Operating Temperature	-22°F to +149°F / -3	30°C to +65°C	-22°F to +149°F / -30°C to +65°C





^{*}Varies depending on light package - 125% NFPA Safety Factor


NIGHT SCAN® VERTICAL LIGHT TOWER

The Will-Burt Night Scan® Vertical Tower is a vertically mounted light tower which may be installed internally or externally to the side or rear of a vehicle. Used for elevating lights and/or cameras, it is typically used on heavy rescue vehicles, full-size mobile command centers, airport ARFF vehicles and large wreckers. Delivering up to 220,000 lumens with the Sirion light package, the Night Scan® Vertical Light Tower is ideal on any vehicle where maximum light and height are required.

Night Scan [®] Vertical	5.4-17	6-20	7-25	8-30
Height (ft.) / (m)	17 / 5	20 / 6	25 / 7.6	30 / 9
Auto Deploy & Auto Stow®	Yes	Yes	Yes	Yes
Number of Lights Available	4 or 6	4 or 6	4 or 6	4 or 6
Light Type Available	LED / Halogen	LED / Halogen	LED / Halogen	LED / Halogen
Maximum Lumens	220000	220000	220000	220000
Full Pan & Tilt Light Positioning	Yes	Yes	Yes	Yes
Opposable Light Fixtures	Yes	Yes	Yes	Yes
VDC / Watts Maximum	12 or 24 / 1380			
VAC / Watts Maximum	120 or 240 / 9000			
Profiler – Space-Saving Fixture Option	Yes	Yes	Yes	Yes
D-TEC® Power Line Detection System Option	Yes	Yes	Yes	Yes
Strobe Light Option	Yes	Yes	Yes	Yes
Camera Option	Yes	Yes	Yes	Yes
Operating Temperature	-22°F to +1	49°F/-30°C	to +65°C	









LIGHTING GUIDE

Will-Burt offers a variety of light options from the top brands in lighting to meet our customers' specific needs. Virtually every electrical system requirement can be met with our lighting solutions. Lighting packages are available in 12 and 24 volt DC and 120 and 240 volt AC. The most sophisticated and long lasting LED lighting available in the market today is offered in low power consumption and high lumen output arrangements. Halogen packages are available for applications where traditional, lower initial cost lighting is needed.

Lighting Comparison	LED (Light Emitting Diode)	Halogen
Although LED lights are more expensive than halogen, LEDs do not require a costly generator. LEDs offer the lowest lifetime cost.	LED lamps are the most efficient light source available, producing more lumens per watt than any other type. LEDs also produce instant light that is closer to daylight than HID or Halogen, which can make a scene appear brighter. LEDs are the longest lasting source of light because they do not use a filament to produce light.	Halogen lamps provide high lumen output and instant light at a low price. However, Halogen bulbs do consume the most power per lumen and also have the shortest life expectancy, requiring bulb replacement throughout the life of the apparatus. Halogen lights typically require a generator.
Lumen Range / Lamp	8,000 - 28,000	10,500 - 35,000
Average Expected Life	50,000 hours	250 hours
Initial Cost		
Lifetime Cost		
Cost / Lumen		
Power Consumption / Lumen		
Brands	AKRON BRASS COMPANY FRC WHELEN® nightscan®	FRC

NIGHT SCAN® SIRION


The Most Powerful Night Scan... EVER!

Sirion LED lamps deliver maximum illumination on Night Scan light towers. These scene lights were designed to optimize the inherent benefits that Night Scan light towers have over the competition. A mix of short and long-range optics insure that the proper level of illumination is provided whether the tower is fully extended to cover the maximum area for a large and diverse scene or lowered to provide intense light on a focused situation.



Now Available in narrow Profiler design





ESSENTIAL FEATURES

- Consistent and constant illumination from the beginning of the mission until the end is assured by an electronic thermal management system and top bin LEDs
- Water-proof and designed for high-vibration applications
- Compact and highly efficient
- 10 year warranty

The three major areas of a nighttime scene are illuminated by Sirion Triple Coverage optics technology:

- The critical work area is illuminated by focused spot light optics
- The apparatus is covered by short-range flood lamps
- The entire scene is evenly illuminated by long-range flood lights

Sirion available on the following light towers:

Night Scan Powerlite: 3.0 and 4.5


Night Scan Vertical Powerlite: 17', 20', 25' and 30'

120 / 240 AC - Total power 1,200 watts 120 VAC / 11 amps, 240 VAC / 5.5 amps

Effective lumens are a true measure of real world light output of a fixture. Raw lumens don't tell the entire story. Bigger numbers don't always mean more light.

Sirion Light Package

Raw Lumens: 220,000 / Effective Lumens: 122,340 30 LUX of light is considered safe for a work area by NFPA

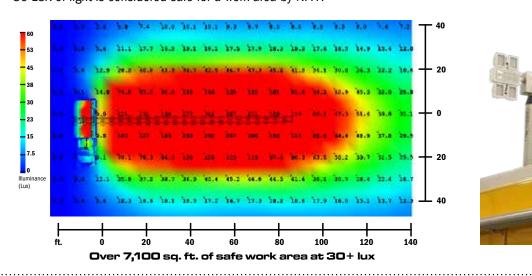



nightscan® by Will-Burt

Tower and Light Package Options





					Oilloi							
								1.0	1.8	2.3	1.8	2.3
		Light		Lumens						Tower Height		
Brand	Model	Warranty	Туре	/ Lamp*	Watts	Voltage	Amps	3.25 ft.	6 ft.	7.5 ft.	6 ft.	7.5 ft.
AKRON		6	LED	20000	220	120 / 240	1.8 / 0.9		2	2		
	10000		LED	11000	90	12 / 24	7.5 / 3.75	2	2 / 4	2 / 4	2/3	2/3
FRC	EVOLUTION	5	LED	20000	160	12	13		2/4	2 / 4		
			LED	20000	160	24	6.5		2/4	2 / 4		
	SPECTRA		LED	20000	230	12	18.3		2	2		
FRC	Se accided	5	LED	20000	230	24	9.2		2	2 / 4		
	***************************************		LED	20000	230	120 / 240	2/1		2	2 / 4		
	SPECTRA		LED	28000	230	12	19.2		2	2		
FRC	SECTION MAX	5	LED	28000	230	24	9.6		2	2 / 4		
	10000000		LED	28000	336	120 / 240	2.8 / 1.4		2	2 / 4		
	SPROTRA		LED	28000	230	12	20.8		2	2		
FRC	BITCH STATE OF THE	5	LED	28000	230	24	10.4		2	2 / 4		
			LED	28000	336	120 / 240	2.8 / 1.4		2	2 / 4		
	'manager and '		Halogen	10500	500	120	4.2		2 / 4	2 / 4	2/3	2/3
FRC	建	0	Halogen	19600	750	120 / 240	6.3 / 3.1	2	2/4	2 / 4	2/3	2/3
••••	CETTON		Halogen	22000	1000	120 / 240	8.3 / 4.2		2 / 4	2 / 4		
	W.		Halogen	35000	1500	240	6.25		2 / 4	2 / 4		
FRC	MAGNAFIRE	0	Halogen	16100	750	120 / 240	6.25 / 3.5	2	2 / 4	2 / 4	2/3	2/3
rne	3 5	Ŭ	Halogen	22000	1000	240	4.2		2 / 4	2 / 4		
WHELEN	Pioneer Plus Spot / Flood	5	LED	9260	75	12.8	6	2	2 / 4	2 / 4	2/3	2/3
WHELEN	F= X = X	5	LED	18520	150	12.8 / 25.6	12 / 6		2 / 4	2 / 4	2/3	2/3
WHILEN	Pioneer Plus Flood / Flood	3	LED	16790	150	115	1.2		2 / 4	2 / 4	2/3	2/3
WHELEN	200000000	5	LED	18520	150	12.8 / 25.6	12 / 6		2 / 4	2 / 4	2/3	2/3
WHILEN	Pioneer Plus Spot / Flood		LED	16790	150	115	1.2		2/4	2 / 4	2/3	2/3
	Pioneer Plus Max		LED	20000	225	12	16.5		2	2		
WHELEN		5	LED	20000	210	24	8.25		2	2 / 4		
			LED	17000	180	120	1.5		2	2 / 4		
	nightscan [*] x200 byWHBurt	5	LED	20000	125	12 / 24	9.2 / 4.6			6	2/3	2/3
	nightscan*	LED	20000	125	12 / 24	9.2 / 4.6	2 / 4	2/4	2 / 4	2/3	2/3	
WILL-BURT		10	LED	20000	125	120 / 240	1.1 / .55	2 / 4	2 / 4	2 / 4	2/3	2/3
	cipion	10	LED	110000	600	12 / 24	50 / 25					
	sirion	10	LED	110000	600	120 / 240	5.5 / 2.75					

^{*}Lumens per light manufacturer specifications - Multiply lumens by number of lamps for total lumens.

¥	Powerlite		Powerlite	e Profiler	Powerlit	e Xtreme	Vertical Complete	Vertic	lig N	ght tower light Scar	stomize a using our
2.3	3.0	4.5	3.0	4.5	6.0	7.5	2.3	5.4-17	6-20	7-25	8-30
						Tower Height					
7.5 ft.	10 ft.	15 ft.	10 ft.	15 ft.	20 ft.	25 ft.	7.5 ft.	17 ft.	20 ft.	25 ft.	30 ft.
	4	4			2	2	2				
							2 / 4				
							2				
	2 / 4	2 / 4					2 / 4				
	4/6	4/6	3	3			2	4/6	4/6	4/6	4/6
	4	4	3	3	2 / 4		2 / 4				
	4 / 6	4 / 6	3	3	2 / 4	2	2 / 4	4 / 6	4/6	4 / 6	4 / 6
	4/6	4/6	3	3			2	4 / 6	4/6	4/6	4/6
	4	4	3	3			2				
	4 / 6	4 / 6	3	3	2 / 4	2	2	4 / 6	4/6	4 / 6	4 / 6
	4 / 6	4 / 6	3	3			2	4 / 6	4 / 6	4 / 6	4 / 6
	4	4	3	3			2				
	4 / 6	4 / 6	3	3	2 / 4	2	2	4 / 6	4/6	4 / 6	4 / 6
	4/6	4/6			4/6	2 / 4	2 / 4	4/6	4/6	4/6	4/6
	4 / 6	4 / 6 4 / 6	3	3	4 / 6 4 / 6	2/4	2 / 4	4 / 6	4/6 4/6	4 / 6 4 / 6	4 / 6 4 / 6
	4/6	4/6	3	3	4/6	2/4	2/4	4/6	4/6	4/6	4/6
	4/6	4/6	3	3	4/6	2/4	2 / 4	4/6	4/6	4/6	4/6
	4/6	4/6	3	3	4/6	2/4	2/4	4 / 6	4/6	4/6	4/6
	·	·			,	,	2/4	,	·	,	
	4/6	4/6	3	3	4 / 6	2/4	2 / 4	4 / 6	4/6	4/6	4 / 6
	4 / 6	4 / 6	3	3	4 / 6	2 / 4	2 / 4	4 / 6	4/6	4 / 6	4 / 6
	4/6	4/6	3	3	4/6	4/6	2 / 4	4/6	4/6	4/6	4/6
	4/6	4/6	3	3	4/6	2 / 4	2 / 4	4 / 6	4/6	4/6	4/6
							2 / 4				
	4/6	4/6			2 / 4	2	2 / 4	4	4	4	
	4 / 6	4 / 6			2 / 4	2	2 / 4	4 / 6	4/6	4/6	4 / 6
4	4/6	4/6	3	3			2 / 4	4 / 6	4/6	4/6	4/6
4	4 / 6	4 / 6	3	3	4/6	2 / 4	2 / 4	4 / 6	4/6	4 / 6	4 / 6
	2	2	1	1				2	2	2	2
	2	2	1	1				2	2	2	2

Revised: June, 2019_v21

NIGHT SCAN® LED LAMPS

The Night Scan family of LED lamps are the only LED scene lights designed specifically for Night Scan light towers. These lamps are engineered to optimize the inherent benefits of Night Scan towers, producing more light, using less power, and covering larger areas. Consistent illumination from the beginning of the mission until the end is


assured by an electronic thermal management system, large heat sinks, and top-bin LEDs. Three Night Scan lamp options ensure that you will have the best possible illumination to meet your requirements.





Model	X200	COLUM	
Raw Lumens	20,000	接錢	
Effective Lumens	11,323	ALL AND	
Optics	Double - Spot / Flood		
Water-Proof Rating	IP69k – high-pressure spray, submersible		
Active Thermal Management	Yes		
Warranty	5 Years		

Model	XL200			
Raw Lumens	20,000	•		
Effective Lumens	11,362	F-1-1-4		
Optics	Double - Spot / Flood			
Water-Proof Rating	IP69k – high-pressure spray, submersible			
Active Thermal Management	Yes			
Warranty	10 Years			

Model	Sirion	333 333
Raw Lumens	110,000	38 33 38
Effective Lumens	61,170	Q.111.S.
Optics	Triple - Spot / Short Flood / Long Flood	
Water-Proof Rating	IP69k – high-pressur spray, submersible	е
Active Thermal Management	Yes	
Warranty	10 Years	

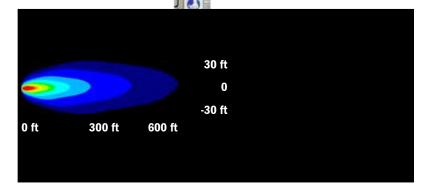

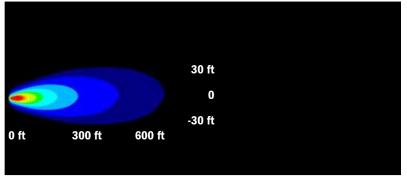

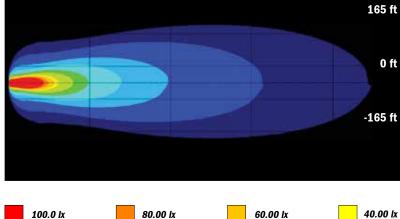

VALUE-ADDED ACCESSORIES

STROBE LIGHTS

Will-Burt lighting solutions include reliable, compact strobe lights for added visibility and safety. Strobes feature a rugged, impact-resistant polycarbonate dome and base, exceptional fiber optics, and a double-flash power supply that automatically adjusts to function at any voltage - from 12V to 24V DC. They meet SAE J1318 Class 3 specifications and are available in LED beacons and a variety of colors: amber, blue, clear, red and green.



REMOTE CONTROLLERS

Will-Burt offers wired and wireless full-function, simple-to-use remote controls. Designed for rugged environments and gloved hands, they can withstand the harshest weather and operating conditions.

All controllers have an emergency stop button for immediate reaction to unexpected situations. All controllers have a one button auto-deploy and auto-stow function to simplify tower operation and they also include a digital display for status feedback.

Choose from our handheld tethered models or a panel-mount version. A full-function, wireless / rechargeable remote-control system with 300' range is available for all Night Scan models. The wireless remote can also be paired with an optional tethered remote control for the ultimate in flexibility and peace of mind operation.



WIRED REMOTES



Chief and Vertical Complete



Powerlite, Xtreme and Vertical

WIRELESS REMOTE



All Night Scan Models

PANEL MOUNT CONTROLS



Chief and **Vertical Complete**



Powerlite, Xtreme and Vertical


D-TEC® LIVE POWER LINE DETECTION SYSTEM

.....

The D-TEC® safety system provides overhead power line detection and above-the-mast illumination. The built-in high voltage, electromagnetic and electrostatic field detection system automatically stops mast extension, providing added protection for the operator and equipment. The D-TEC® safety system is available on powerlite and vertical telescoping masts.

D-TEC® SAFETY FEATURES:

- Dual threshold AC alert, E-Field (current) and H-Field (magnetic)
 - AC voltage detection range starting at 110VAC/60Hz
- Senses both AC current and AC voltage
- 3-axis field detection
- LED Look-Up Light
- Audible alerts
- Alphanumeric LED display
- Built-in Emergency Bypass
- Expanded self-testing features
- · Factory pre-set siren and verbal warning in English and Spanish

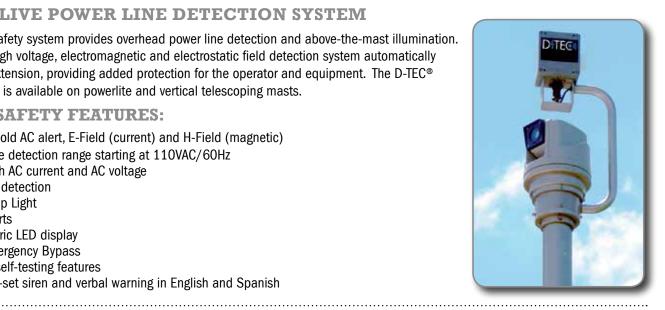

NIGHT SCAN® SPOT

The Night Scan Spot is a rotatable, remote-controlled LED light. The wireless remote allows the light to be remotely adjusted by the operator.

With a vertical tilt up of 70° and 45° tilt down and an infinite horizontal rotational range (clockwise and counterclockwise), The Night Scan Spot from Will-Burt allows for pan-tilt motion. Also equipped with a flashing alert feature, the remote-controlled LED light can be used to warn approaching motorists or pedestrians of potential hazards or help is needed. It can also be used with service vehicles to alert the on-coming vehicles there are people at work, and more.

SPECIFICATIONS

Lumens	6,720
Operating Voltage	10 - 30VDC
Power Consumption	80W
Maximum Distance for Operating Remote Control	Up to 130 ft.
Weight	7 lbs. (3.2KG)
Remote Control Battery	(1) 23A battery



nightscan spot

NIGHT SCAN® SCOUT

Night Scan Scout floods your rescue scene with powerful LED light that lets you get the job done quickly and safely. Scout delivers the flexibility to be mounted almost anywhere on your mobile platform; roof, roll-bar, crane, boom, nearly any solid surface. Scout is a 12 volt system powered directly from your vehicle, no need for an expensive generator. Two long range wireless remote controls are provided with every light system. Night Scan Scout is an essential tool for nighttime operations.

SPECIFICATIONS

Total Lumens	40,000				
Height	10 in. / 254 mm				
Width	20 in. / 508 mm				
Depth	5.5 in. / 140 mm				
Weight	36.5 lb. / 16.5 kg				
Operating Temperature	-20°C to 50°C / -4°F to 122°F				
IR Rating - Waterproof	Lights: IP69K	Positioner: IP68			
Pan Axis (rotation)	400° (±200°)				
Tilt Axis	180° (±90°)				
Maximum Continuous Power	263 watts				
Maximum Running Current	21.9 amps				
Input Voltage	12 VDC - 24 VDC a	nd AC Options			





ESSENTIAL FEATURES

- Direct 40,000 lumens of light exactly where you need it
 - Control both rotation and tilt angle of lights
- 2 wireless long-range remote controls
- Install anywhere
- Fits any size vehicle
- Water-proof / Weather-proof
- 12 volt operation

MOBILE VIDEO SYSTEMS

Will-Burt Night Scan® Light Towers deliver the capability of camera mounting, with or without lights. A camera, elevated to a height from 3.25 ft. to 30 ft. above the vehicle roof, allows ground personnel to survey an emergency scene quickly and efficiently. In addition, the system offers real-time monitoring and surveillance for accurate records and documentation. Will-Burt has several camera, DVR, monitor and software packages that fit a variety of needs. Our video solutions experts can also design a customized package to fit your specific requirements. Below is a sample of our video solutions.











Feature		WONWOO - IR	Viper SD	Viper HD	Viper TI	
Camera Type	Analog	PTZ - Analog Infrared	PTZ – Analog or IP Standard Definition	PTZ – Analog or IP High Definition	PTZ – Analog or IP Thermal Imaging	
Lens	8mm / 2.8 mm	3.4mm - 122.4mm	3.4mm - 122.4mm	4.7mm – 94.0mm	19mm	
Image Sensor	Sharp CCD	Exview HAD CCD	Interline Transfer CCD	2MP CMOS High Definition	8-14 micron spectral uncooled microbolometer	
Resolution	510 x 492 / 420 TV lines	1028 x 508 / 700 TV Lines	768 x 582 / 520 TV Lines	1920 x 1080	320 x 240 / 225 TV Lines	
Optical Zoom / Digital Zoom	Fixed	36x / 32x	35x / 10x	20x / 10x	N/A	
Low Light	0 LUX with 10 IR LED's	0.2 LUX with 46 IR LEDs / 80m	0.01 LUX in IR mode	Less than 3 LUX		
Pan & Tilt	No	360° endless pan / -22.5° - 90° tilt	360° endless pan and tilt	360° endless pan and tilt	360° endless pan and tilt	
Ingress Protection	IP67 - Waterproof	IP66 - Outdoors	IP67 - Waterproof	IP67 - Waterproof	IP67 - Waterproof	







Video + **Thermal**

	1						
Feature	Silent Sentinel Oculus SD	Silent Sentinel Oculus HD	Silent Sentinel Oculus IR SD	Silent Sentinel Oculus IR HD			
Camera Type	PTZ - Analog or	IP	PTZ – Analog or IP w/Infrared Illuminator - 100 meters				
Lens	3.4mm to 122.4mm	4.3mm to 129.0mm	3.4mm to 122.4mm	4.3mm to 129.0mm			
Image Sensor	1/4-type Exview HAD CCD	1/2.8" type Exmor CMOS sensor	1/4-type Exview HAD CCD	1/2.8" type Exmor CMOS sensor			
Resolution	550 TV lines SD	2.13MP	550 TV lines	2.13MP			
Optical Zoom / Digital Zoom	36x / 12x	30x / 12x	36x / 12x	30x / 12x			
Low Light	Color 0.1 lux Mono 0.01 lux	Color 0.01 lux Mono 0.0008 lux	Color 0.1 lux Mono 0.01 lux	Color 0.01 lux Mono 0.0008 lux			
Signal System	NTSC/PAL	HD: 1080p / SD: NTSC/PAL	NTSC/PAL				
Pan & Tilt	360° pan / +90	0° to -30° tilt					
Ingress Protection	IP67 - Waterproof						
Communications	Pelco-D, Pelco-P, CBC OCP485, Forward Vision Mic1 FV300, Philips, Vicon						
Camera Warranty	2 years						

Video Camera Feature	Silent Sentinel - Oculus TI SD	Silent Sentinel - Oculus TI HD	Thermal Camera Feature	Specification	
Camera Type	PTZ – Analog or Video + Therma		Sensor type	Uncooled VOx Microbolometer	
Lens	3.4mm to 122.4mm	4.3mm to 129.0mm	Pixel size	17μ	
Image Sensor	1/4-type Exview HAD CCD	1/2.8" type Exmor CMOS sensor	Spectral band	8-14µm	
Resolution	550 TV lines	2.13MP	Thermal	<50mK	
Optical Zoom / Digital Zoom	36x / 12x	30x / 12x	sensitivity	320 x 240 or	
Low Light	Color 0.1 lux Mono 0.01 lux	Color 0.01 lux Mono 0.0008 lux	format	640 x 480	
Signal System	NTSC /PAL	HD: 1080p/	Frames rates	9Hz, 30Hz	
oigilai oysteili	MISOTIAL	SD: NTSC/PAL	Image control	White hot,	
Pan & Tilt	360° pan / +9	00° to -30° tilt	illiage collicol	Black hot, Invert	
Ingress Protection	IP67 - Waterpro	IP67 - Waterproof		Fixed, preset, Athermalised	
Communications	Pelco-D, Pelco- Forward Vision Philips, Vicon	P, CBC OCP485, Mic1 FV300,	Zoom	E-zoom 1-4, Region of interest	
Camera Warranty	1 7		FOV	35mm (other FOV available)	

LED LIGHTING UPGRADE KITS

nightscan[®]

Collar Light Assembly Connection

Brand	Model	Light Warranty	Volts	Number of Lights	Total Lumens	Total Watts	1.8	2.3	Powerlite	Vertical	RCP
FRC	SPECTRA	5	12	2	40,000	460	х	х			Collar
Whelen	Pioneer Plus Flood	5	12	2	16,000	150	х	х			Collar
Whelen	Pioneer Plus Flood	5	12	2	32,000	300	Х	х			Collar
Whelen	Pioneer Plus Flood/Flood	5	12	4	32,000	300	х	х			Collar
Whelen	Pioneer Plus Flood/Flood	5	12	2	64,000	600	х	х			Collar
Whelen	Pioneer Plus Spot/Flood	5	12	4	32,000	300	х	х			Collar
Whelen	Pioneer Plus Spot/Flood	5	12	2	64,000	600	Х	х			Collar
FRC	Evolution II	5	12/24	2	22,000	180	х	х			Collar
FRC	Evolution II	5	12/24	2	40,000	320	х	х			Collar
FRC	Evolution II	5	12/24	4	44,000	360	х	х	х	Х	Collar
FRC	Evolution II	5	12/24	4	80,000	640	х	х	Х	Х	Collar
Will-Burt	Night Scan XL200	10	12/24	2	40,000	250	х	х			Collar
Will-Burt	Night Scan XL200	10	12/24	4	80,000	500	х	Х	Х	Х	Collar
Will-Burt	Night Scan XL200	10	12/24	6	120,000	750			х	Х	Collar
Will-Burt	Night Scan XL90	10	12/24	2	18,000	180	х	х			Collar
Will-Burt	Night Scan XL90	10	12/24	4	36,000	360	x	х			Collar
FRC	Evolution II	5	24	4	80,000	640	х	х	х	Х	Collar
FRC	SPECTRA	5	24	4	80,000	920		х	х		Collar
Whelen	Pioneer Plus Flood	5	24	2	16,000	150	х	Х			Collar
Whelen	Pioneer Plus Flood	5	24	4	32,000	300	х	х			Collar
Whelen	Pioneer Plus Flood/Flood	5	24	2	32,000	300	Х	Х			Collar
Whelen	Pioneer Plus Flood/Flood	5	24	4	64,000	600	x	х	х	х	Collar
Whelen	Pioneer Plus Spot/Flood	5	24	2	32,000	300	х	х			Collar
Whelen	Pioneer Plus Spot/Flood	5	24	4	64,000	600	X	х	х	Х	Collar
FRC	SPECTRA	5	120	2	40,000	460	х	х			Collar
FRC	SPECTRA	5	120	4	80,000	920		х	х	Х	Collar
FRC	SPECTRA Max	5	120	4	112,000	1344			х	Х	Collar
FRC	SPECTRA Max-S	5	120	4	112,000	1344			х	х	Collar
Whelen	Pioneer Plus Flood	5	120	2	16,000	150	X	х			Collar
Whelen	Pioneer Plus Flood	5	120	4	32,000	300	X	х			Collar
Whelen	Pioneer Plus Flood/Flood	5	120	2	30,000	300	х	х			Collar
Whelen	Pioneer Plus Flood/Flood	5	120	4	60,000	600	х	х	Х	Х	Collar
Whelen	Pioneer Plus Flood/Flood	5	120	6	90,000	900			х	Х	Collar
Whelen	Pioneer Plus Spot/Flood	5	120	2	30,000	300	х	х			Collar
Whelen	Pioneer Plus Spot/Flood	5	120	4	60,000	600	X	х	х	Х	Collar
Whelen	Pioneer Plus Spot/Flood	5	120	6	90,000	900			х	х	Collar
FRC	SPECTRA	5	240	2	40,000	460	х	х			Collar
FRC	SPECTRA	5	240	4	80,000	920		х	Х	Х	Collar
FRC	SPECTRA Max	5	240	4	112,000	1344			Х	Х	Collar
FRC	SPECTRA Max-S	5	240	4	112,000	1344			Х	Х	Collar

Shaft Light Assembly Connection

Brand	Model	Light Warranty	Volts	Number of Lights	Total Lumens	Total Watts	1.8	2.3	Powerlite	Vertical	RCP
FRC	Magnafire 1000 AC	0	240	4	88,000	4000			Х	Х	Apple Shaft
Will-Burt	Night Scan XL200	10	120/240	2	40,000	250			Х	х	Apple Shaft
Will-Burt	Night Scan XL200	10	120/240	4	80,000	500			х	х	Apple Shaft
FRC	Magnafire 1000 AC	0	240	4	88,000	4000			Х	х	Flange Shaft
Will-Burt	Night Scan XL200	10	120/240	2	40,000	250			Х	Х	Flange Shaft
Will-Burt	Night Scan XL200	10	120/240	4	80,000	500			Х	х	Flange Shaft
FRC	Evolution II	5	12	4	80,000	640	х	х			Shaft
Whelen	Pioneer Plus Flood	5	12	2	16,000	150	х	х			Shaft
Whelen	Pioneer Plus Flood/Flood	5	12	2	32,000	300	х	х			Shaft
FRC	Evolution II	5	12/24	2	22,000	180	х	х			Shaft
FRC	Evolution II	5	12/24	2	40,000	320	х	х			Shaft
FRC	Evolution II	5	12/24	4	44,000	360	х	х			Shaft
Will-Burt	Night Scan XL200	10	12/24	2	30,000	250	х	х			Shaft
Will-Burt	Night Scan XL200	10	12/24	4	80,000	500	х	х	х	х	Shaft
Will-Burt	Night Scan XL200	10	12/24	6	120,000	750			Х	х	Shaft
FRC	Evolution II	5	24	4	44,000	360			Х	х	Shaft
FRC	Evolution II	5	24	4	80,000	640			Х	Х	Shaft
FRC	Evolution II	5	24	4	80,000	640			х	х	Shaft
Whelen	Pioneer Plus Flood	5	24	2	16,000	150	х	х			Shaft
Whelen	Pioneer Plus Flood	5	24	4	32,000	300	х	х			Shaft
Whelen	Pioneer Plus Flood/Flood	5	24	2	32,000	300	х	х			Shaft
Whelen	Pioneer Plus Flood/Flood	5	24	4	64,000	600	х	х	х	х	Shaft
FRC	SPECTRA	5	120	6	120,000	1380			Х	х	Shaft
FRC	SPECTRA Max	5	120	4	112,000	1344			х	х	Shaft
FRC	SPECTRA Max	5	120	6	168,000	2016			Х	х	Shaft
FRC	SPECTRA Max-S	5	120	4	112,000	1344			х	х	Shaft
FRC	SPECTRA Max-S	5	120	6	168,000	2016			Х	х	Shaft
Whelen	Pioneer Plus Flood/Flood	5	120	4	60,000	600	х	х	Х	х	Shaft
Whelen	Pioneer Plus Flood/Flood	5	120	6	90,000	900			Х	х	Shaft
Whelen	Pioneer Plus Spot/Flood	5	120	4	60,000	600	х	х	х	х	Shaft
Whelen	Pioneer Plus Spot/Flood	5	120	6	90,000	900			Х	х	Shaft
FRC	SPECTRA	5	240	4	80,000	920		х	х		Shaft
FRC	SPECTRA	5	240	6	120,000	1380			х	х	Shaft
FRC	SPECTRA Max	5	240	4	112,000	1344			х	х	Shaft
FRC	SPECTRA Max	5	240	6	168,000	2016			Х	х	Shaft
FRC	SPECTRA Max-S	5	240	4	112,000	1344			х	х	Shaft
FRC	SPECTRA Max-S	5	240	6	168,000	2016			Х	х	Shaft
Will-Burt	Sirion	10	120/240	2	220,000	1200			Х	х	Shaft

Will-Burt is the exclusive Fire Dealer and Fire Department distributor of Firetech LED lights.



Firetech is a complete line of apparatus LED lighting

For additional detailed information visit www.hivizleds.com. Contact your Will-Burt sales representative today.

BROW LIGHTS - FROM 4" TO 72"



RECESSED SCENE LIGHTING



WORK LIGHTS





SURFACE MOUNT SCENE LIGHTING





LED HEADLIGHTS



POLE LIGHTS




LONG-RANGE LIGHT CANNONS, COMPARTMENT LIGHTS, RETROFIT LIGHTS AND MORE...









CONTACT YOUR SALES REPRESENTATIVE TODAY

The Will-Burt Company, headquartered in Orrville, Ohio, USA, is the world's premier manufacturer of mobile telescoping masts, towers and pan and tilt positioners. We offer virtually every payload elevation and integration solution from the top brands; Will-Burt, GEROH, Integrated Tower Systems (ITS) and MAD – for defense, government, first responders, cellular, broadcast, energy production and other markets. Will-Burt also offers contract manufacturing, metal fabrication, powder-coating, and rapid prototyping services. All Will-

Burt Company manufacturing locations are backed by a certified ISO 9001:2015 Quality Management System. Incorporated in 1918, Will-Burt is 100% employee-owned and is classified as a small business.



www.willburt.com

UNITED STATES

WORLD HEADQUARTERS 401 Collins Blvd Orrville, OH USA 44667 Telephone: 330.682.7015 Mast Customer Service: 330.684.4000 Fax: 330.684.1190 Email: info@willburt.com

INTEGRATED TOWER SYSTEMS

A WILL-BURT COMPANY 2703 Dawson Road, Tulsa, OK 74110 Telephone: 800.850.8535 Fax: 918.749.8537 Email: programs@itstowers.com

WILL-BURT EU

Unit 5b. Station Approach Four Marks, Alton Hampshire, GU34 5HN, United Kingdom Telephone: +44 (0) 1403 265532 Fax: +44 (0) 1403 259072

WILL-BURT TURKEY

2118. Cad. No: 4, B101 Mustafa Kemal Mah. 06530 Çankaya

EUROPE

GEROH A Will-Burt Company Fischergasse 25 91344 Waischenfeld, Germany Telephone: +49-9202-18-0 Fax: +49-9202-18-11 Email: info@geroh.com

ASIA

SINGAPORE SALES OFFICE 1 Fullerton Road, #02-01 One Fullerton. Singapore 049213 Telephone: +65 6832 5689 Fax: +65 6722 0664

Ankara, Turkey Telephone: +1 202 820 2184

ISO 9001:2015